

PBX User Guide

FastFind Links

Using Your Desk Phone Using the User Web Portal Voicemail Answering Rules and Time Frames Contacts

Phones

Music On Hold

Call History

Profile



CONTENTS

Сс	Contentsii		
Int	roductioniv		
1.	Using Your Desk Phone5		
	Making Calls6		
	Making International Calls6		
	Extension Dialing6		
	Intercom6		
	Receiving Calls7		
	Voicemail7		
	Accessing Voicemail7		
	Setting Up Your Mailbox8		
	Alternate Greetings8		
	Voicemail Tree8		
	Handling Calls		
	Attended Transfer10		
	Blind Transfer		
	Transfers to External Numbers 11		
	Voicemail Transfer11		
	Park and Hold11		
	Directed Call Pickup11		
	3-Way Conference 11		
2.	Using the User Web Portal13		
	Accessing the Portal14		
	Desktop Call Control14		
	Incoming Calls14		
	Active Calls15		
	Hom 16		
	Voicemail17		
	Messages 17		
	Voicemail Settings18		
	Recording a Greeting19		
	Uploading a Greeting21		
	Recorded Name22		

Answering Rules and Time Frames	
Time Frames	
If you select Days of the week and times	
If you select Specific dates or ranges	
Answering Rules	
Call Forward Drop-down Options	
Ring Timeout	
Allowing or Blocking Callers	
Contacts	
Filter and Search	
Add and Import Contacts	
Adding a Contact	
Importing Contacts	
Selecting Favorites	
Editing Contacts	
Phones	
Using SNAPmobile	
Music On Hold	
Adding Music on Hold Files	
Playing an Introductory Greeting	
Call History	
Filtering the Call History	
Exporting the Call History Log	
Profile	
Index	

INTRODUCTION

Welcome to the Cloud PBX User Guide. Your Cloud PBX combines the best in traditional phone system features with modern Internet Protocol (IP) capabilities. In this guide, you will learn how to perform many common tasks on your phone, as well as make full use of your web portal.



1. USING YOUR DESK PHONE

Topics:

- ▲ Making Calls (page 6)
- Receiving Calls (page 7)
- ▲ Voicemail (page 7)
- ▲ Handling Calls (page 10)

While there are many different models of desk phones, they largely all work the same way. In this chapter, you will learn how to use common functions of your phone.

Making Calls

Making a call with your phone does not require a leading 9. You can dial on-hook or off-hook.

> To dial on-hook

- 1. Dial the phone number.
- 2. Pick up the handset, headset, or speaker.

> To dial off-hook

- 1. Pick up the handset, headset, or speaker.
- 2. Dial the phone number.

Calls to the US and Canada are all dialed using 10 or 11 digits. Local calls can be dialed using 7 digits.

Making International Calls

- > To dial an international call
- 1. Dial the international call code 011.
- 2. Dial the country code.
- 3. Dial the local number.

International calling is commonly disallowed to prevent toll fraud.

Extension Dialing

Extensions on your system can be dialed using their 3-to-4 digit extension or by pressing the button on your phone corresponding to the desired extension.

Intercom

VoIP phones provide an intercom feature that allows you to instantly connect to other phones within your office. Intercom functionality is ideal for announcing visitors or asking a quick question.

When one phone intercoms another extension, it does not ring the other phone. Instead, the other phone will beep, and then its microphone and speaker turn on.

> To intercom

1. Dial 08ext. For example, to intercom extension 100, dial **08100**.

Receiving Calls

When a call comes in, you can answer it via a headset, speakerphone, or handset.

- > To answer a call using a handset
 - Lift the handset off-hook.

> To answer a call using a speakerphone

- Press the **Speaker** button.
- > To answer a call using a headset
 - Usage depends on how the headset is connected. Often, you'll press the button on the headset or press the headset button on the phone.

Voicemail

Accessing Voicemail

- > To access voicemail
- 1. Press the **Messages** button on your phone to access your voicemail box, or dial 5001 if you can not identify the voicemail button.
- 2. If you subscribe to multiple mailboxes, a list of mailboxes may appear. Select the mail box you want to access.
- 3. When prompted, enter your voicemail pin, and then press #.

> To access another person's mailbox

- 1. Dial **5000**.
- 2. When prompted, enter the other person's extension number.
- 3. Enter the voicemail PIN of the other person's mailbox, followed by #.

Setting Up Your Mailbox

The first time you log in to your mailbox you are walked through recording your name for the directory and recording your personal greeting.

The name recording is for the dial-by-name directory, so when someone enters the first three letters of your last name, it will play back your name recording.

The greeting plays when your mailbox is reached. It is very important to make a custom message, as many callers will not leave messages at mailboxes that have generic greetings.

Alternate Greetings

Your mailbox supports multiple greetings for different scenarios like business trips and holidays.


> To record an alternate greeting

- 1. From your mailbox, press **6** for greetings, and then press **1** to record an alternate greeting.
- 2. When prompted for the greeting number press **2** for your next alternate greeting (1 is your default greeting).
- 3. After your recording is completed, select the active greeting by selecting option **3** in the greetings menu.

Voicemail Tree

On the next page you'll find a voicemail tree showing what to dial for each option in your mailbox.



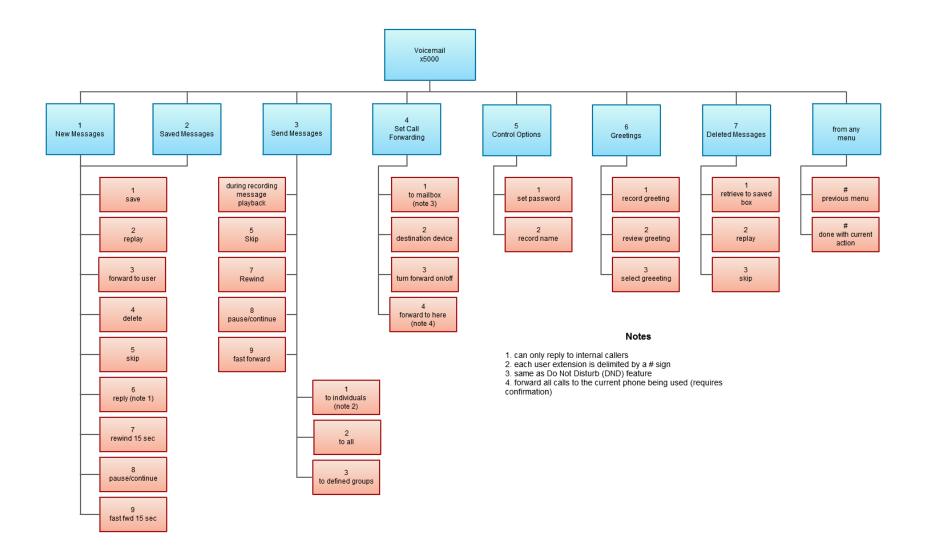



Handling Calls

Your cloud PBX features various ways to move calls around, including attended transfer, unattended (blind) transfer, voicemail transfer, park, and more. In this section, references to BLFs are the 1-touch buttons to extensions common at front-desk phones.

Attended Transfer

Attended transfer allows you to speak to the transfer recipient prior to completing the transfer while the caller is on hold.

- > To perform an attended transfer using Polycom and Yealink phones
- 1. Press the Transfer key/softkey on your phone.
- 2. Dial the recipient's extension or press their BLF.
- 3. Speak to the recipient, and then either press **Transfer** again to complete or cancel if the recipient cannot take the call.

Blind Transfer

Blind transfer goes straight to the recipient.

- > To blind transfer using Polycom phones with older firmware
- 1. Press Transfer.
- 2. Press the **Blind** softkey. (if there is no Blind softkey see directions for new firmware)
- 3. Enter the extension of the recipient or the recipient's BLF.

> To blind transfer using Polycom phones with newer firmware

- 1. Press and hold the **Transfer button**.
- 2. Select Blind from the on screen menu
- 3. Enter the extension of the recipient or the recipient's BLF.

> To blind transfer using Yealink phones

- 1. Press Transfer.
- 2. Dial the extension of the recipient
- 3. Press Transfer.

Transfers to External Numbers

A transfer can also go to an external number such as a cell phone. Follow the transfer directions above but instead of dialing an extension, dial a 10 digit phone number.

Voicemail Transfer

Voicemail transfer goes straight to the recipient's voicemail box without ringing the recipient's phone.

- > To perform a voicemail transfer
 - Perform a blind transfer with a 03 prefix before the extension. For extension 111's voicemail, for example, blind transfer to 03111.

Park and Hold

On your phone system, hold is a local function. This means a call held on your phone cannot be picked up at another station. Park is a system-wide function. This means a call parked at one phone may be picked up by any phone.

> To park a call

- 1. Dial *** in an active call from any phone. The system says, "The call is parked at 7*xx*."
- 2. Hang up.

To retrieve the parked call, dial **7***xx* where *xx* is the number stated by the system.

Directed Call Pickup

Directed call pickup (DCP) allows you to answer a call ringing at another station.

- > To perform a directed call pickup
 - Dial 07ext. If 111 is ringing, for example, dial 07111 to pick up that call.

Phones with BLFs to the ringing station can also press the corresponding BLF.

3-Way Conference

- > To make a 3-way conference
- 1. Call or be called by the first participant in the conference.
- 2. Press the **Conference** key/softkey, and then dial the second participant.

3. After the second participant picks up, press **Conference** again to connect everyone.



2. USING THE USER WEB PORTAL

Topics:

- Accessing the Portal (page 14)
- Voicemail (page 17)
- Answering Rules and Time Frames (page 22)
- Contacts (page 36)
- Phones (page 39)
- → Music On Hold (page 41)
- ▲ Call History (page 44)
- Profile (page 48)

Each extension of your Cloud PBX system has access to a powerful web portal for managing voicemail, call routing, and more.

Accessing the Portal

- > To access the web portal
- 1. Start a web browser.
- 2. Go to https://portal.fountnetworks.com.
- 3. At the login page (see Error! Reference source not found.):
 - Enter your Login Name (*typically your email address*) and Password. If you do not know your Login Name or Password use the applicable Forgot Link.
 - If you never received these details use the **New User** link

assword	
Log In	
Forgot Login Name Forgot Password	
Forgot Login Name Forgot Password	

Desktop Call Control

Desktop call controls appear when making or receiving a call. These controls allow you to see who is calling and manage a current call.

Incoming Calls

Incoming calls appear in a window in the portal similar to the one in Figure 2-1. This window shows the caller ID name and number, along with **Reject** and **Answer** buttons.

• Selecting **Reject** sends the call to voicemail if available. The **Answer** button may not be available, depending upon your handset model.



Figure 2-1. Example of an Incoming Call

Active Calls

Figure 2-2 shows an active call window that displays the caller ID and call time. The three controls at the bottom of the window let you hold, hang up, or transfer the call. If you select transfer, a field appears for entering the extension of the recipient. If you prefix the recipient's extension number with 03, the call goes straight to voicemail.




Figure 2-2. Example of Active Call Window

Home

The Home page of your portal provides an at-a-glance view of everything going on with your extension. Table 2-1 describes the areas on the Home page.



NEW MESSAGES »				S	STATUS MESSAGE
From		Date	Duration		Enter a new status message
(206) 555-8555	HEIRER_HEIRE THRME	Today, 10:38am	0:36		
(206) 555-5597	WWW.1277417E (312)-33	Apr 4th, 10:19am	0:34		ACTIVE AN SWERING RULE »
					Open Hours 🔹
					Simultaneously ring: • x5702 • x5702a • x5702c • x5702b • x5702d • x5702d • x5702e
RECENT CALL HISTORY	>			S	
Number	Name	Date	Duration		ACTIVE PHONES »
(206) 555-8555		Today, 10:41a	m 1:22		5702e Panasonic_KX-TGP500B0
(206) 555-1389	DAVENPORT NORL	Today, 10:38a	m 0:04		5702c Polycom 335-UA/3.3.4
(206) 555-8555	HERE NER THINK	Today, 10:36a	m 2:24		5702 PolycomVVX-VVX_400-UA

Figure 2-3. Example of Home Page

Table 2-1. Fields in the Home Page

Field	Description
New Messages	Shows new messages. You can play messages, click to call back, download, save, and delete. To see all the controls, hover over the message.
Recent Call History	Color-coded icons show your recent calls.
	Green icon = outbound call.
	Red icon = missed inbound calls.
	Blue icon = inbound received calls.
	To call back a number, click the phone number.
Status Message	Allows you to enter a status message that appears to other users of the portal.
Active Answering Rule	Your extension can have multiple answering rules. For example, you might ring your phone in one mode or forward to your cell in another mode. In this field, you can which answering rule is the active rule.
Active Phones	Your extension may have multiple phones (for example, one in the office and one at home). This field shows which handsets are currently online.

Voicemail

You configure voicemail using the Messages page. This page has two tabs for handling voicemail:

- Messages see "Messages" below.
- Settings see "Voicemail Settings" on the next page.

To display the Messages page, click the **Messages** icon at the top of the page:



Messages

The **Messages** tab allows you to manage your new, saved, and deleted voicemail, as well as greetings and other settings.

Me	Messages Ø					
Me	Messages Settings					
Ne	New -					
	From		Date	Duration		
	(206) 555-8555	HERE, HER, THIND	Today, 10:38am	0:36		
	(206) 555-5597	WWW. STIMITE CORE-IS	Apr 4th, 10:19am	0:34		

Figure 2-4. Messages Page

Like the Home page, you can play messages, click a number to call it back, and download, save, forward, and delete messages. To see all the controls available, hover the mouse pointer over a message.

The **New** drop-down list allows you to review New, Saved, and Trash (recently deleted) messages.

New	+
New	
Saved	
Trash	

Voicemail Settings

Clicking the **Settings** tab displays options for controlling your voicemail order, timestamps, greetings, and voicemail to email.

Messages	Settings	
		C Enable Voicemail
Inbox		
	Options	Sort voicemail inbox by latest first
		Announce voicemail received time
		Announce incoming call ID
Ope	rator Forward	Enter Operator Extension
Greetings		
Voice	email Greeting	
Re	corded Name	
Unified Me	ssaging	
Ema	ail Notification	None
		Save Cancel

Figure 2-5. Settings Tab

Table 2-2. Fields in the Settings Tab

Field	Description
Enable Voicemail check box	Enables (check) or disables (uncheck) voicemail.
Inbox	These options affect audio voicemail (calling in) but not the portal.
	Sort Voicemail inbox by latest first = plays your newest messages first.
	Announce voicemail received time = plays the timestamp of the message.
	Announce incoming call ID = plays the caller ID number if available.
	 Operator Forward = option to press 0 in a mailbox greeting and be directed elsewhere.
Greetings	Allows you to select an active voicemail greeting, listen to it, and record a new greeting.
	 To select the active voicemail greeting, click it from the pull-down menu and click Save.
	To listen to a selected greeting on your PC, click the play button:
	• To record a greeting, see "Recording a Greeting" on page 19.

Field	Description
Unified Messaging	Provides the following selections for adjusting your voicemail to email settings.
	• None = no email is sent when voicemail is left.
	• Send w/ hyperlink = a link to the voicemail is emailed to you.
	• Send w/ brief hyperlink = a link to the voicemail in plaintext is emailed to you.
	 Send w/ attachment (storage option) = an email is sent to you with the audio file of the message attached. The storage option allows you to leave messages in your inbox as new, move to saved, or move to trash.
	• Send w/ brief attachment (<i>storage option</i>) = an email is sent to you in plaintext with the audio file of the message attached. The <i>storage option</i> allows you to leave messages in your inbox as new, move to saved, or move to trash.

Recording a Greeting

- > To record a greeting
- From the Settings tab of the Messages page, click the speaker icon A Manage Greetings page similar to the one in Figure 2-6 appears.

Manage Greetings			×
New Greeting Browse Greeting Name	Upload Record Name for this greeting		
	Upload		
No	greetings have been added		
		Add Greeting	Done

Figure 2-6. Manage Greetings Page

2. Next to **New Greeting**, click **Record**.

The **Browse** button changes to a **Call me at** field.

	Manage Greetings	
	New Greeting	O Upload Record
Call me at field ————	Call me at	123456
	Greeting Name	Name for this greeting
		Call

- 3. In the **Call me** at field, enter a number to call. This can be an extension or a telephone number such as your cell phone.
- 4. In the Greeting name field, enter a name for this greeting.
- 5. Click the **Call** button.
- 6. At the prompt, record the new greeting. When you finish the greeting, press #.
- 7. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page.

Uploading a Greeting

- > To upload a greeting
- From the Settings tab of the Messages page, click the speaker icon Settings.
 A Manage Greetings page similar to the one in Figure 2-6 on page 20 appears.
- 2. Hover over a greeting. Options appear for editing, deleting, or renaming the greeting.
- 3. Next to New Greeting, click Upload.
- 4. Click the **Browse** button.
- 5. In the Choose File to Upload dialog box, select a WAV or MP3 recording from your PC, and then click **Open**.

The path and file name appear in the **Browse** field.

- 6. Click **Upload**.
- 7. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page.

Recorded Name

If your company has a dial-by-name directory, you must record your name for the directory to be found. You can click the play button to listen to your current name recording on your PC, or click the speaker button to record or upload a new name recording.

Answering Rules and Time Frames

Though Answering Rules and Time Frames are separate tabs, they are so interconnected that describing them together makes sense.

Time Frames

Time frames allow you to control the scheduling of the system. You configure time frames using the Time Frames page. To display this page, click the **Time Frames** icon at the top of the page:



Three common time frames are:

- Open Hours (for example, M-F 9am-5pm)
- Holidays (Independence Day, Thanksgiving, New Year's, and so on)
- Closed Hours (all other times)

Time frames can be both shared (system-wide and set by the administrator) or personal to your extension. You can add a time frame to your extension by clicking the **Add Time Frame**.

Time Frames			C
			Add Time Frame
Name	Description	Owner	
Cell Forward Edit	Days and Times	5702	
Closed Hours	Always	Shared	
Customer Care Hours	Days and Times	Shared	
Holidays	Specific Dates	Shared	
Kevin Holiday	Specific Dates	5702	
Open Hours	Days and Times	Shared	

> To add time frames

1. From the Time Frames page, click **Add Time Frame**.

The Add a Timeframe page appears.

Add a Timeframe				×
	Name When	Note: Name cannot be changed Always Days of the week and times Specific dates or ranges		
			Cancel	Save

- 2. In the **Name** field, enter a name for this time frame.
- 3. Next to **When**, select the time period when the time frame will be applied:
 - Always = select this option if the time frame will always be applied. Click Save to complete the procedure.
 - Days of the week and times = select this option to select days and times when the time frame will be applied. Proceed to "If you select Days of the week and times" on page 24.
 - Specific dates or ranges = select this option to specify a specific date or range of dates. Proceed to "If you select Specific dates or ranges" on page 28.

If you select Days of the week and times

Options appear for selecting days and times when the time frame will be applied (see Figure 2-7).

Add a Ti	imefram	е							×
		Name	Normal Business Ho	urs X	Note: Name ca	annot be changed			
		When	🔿 Always 💿 Day:	s of the week and	times 🔿 Specific	c dates or ranges			
Sunday	12:00 AM		6:00 AM	12:0	IO PM	6:00 PM		11:59 PM	(+)
Monday	12:00 AM		6:00 AM	12:0	IO PM	6:00 PM		11:59 PM	•
Tuesday	12:00 AM		6:00 AM	12:0	IO PM	6:00 PM		11:59 PM	•
Wednesday	12:00 AM		6:00 AM	12:0	IO PM	6:00 PM		11:59 PM	•
Thursday	(12:00 AM		6:00 AM	12:0	IO PM	6:00 PM	6:00 PM		+
Friday	12:00 AM		6:00 AM	12:0	IO PM	6:00 PM		11:59 PM	+
Saturday	12:00 AM		6:00 AM	12:0	IO PM	6:00 PM		11:59 PM	+
							Cancel	Save	

Figure 2-7. Setting Days of the Week and Times

1. Using the check boxes next to the name of each day of the week, check the days when the time frame will be applied. A blue line to the right of checked day shows the default hours for this time frame (9:00 AM through 5:00 PM).

Add a Ti	mefram	e						×	
		Name	Normal Busines	ss Hours	Note: Na	me cannot be changed			
		When	🔿 Always 💿	Days of the we	ek and times S	pecific dates or ranges			
Sunday	12:00 AM		6:00 AM	/	12:00 PM	6:00 PM	11:59 PM	(+)	
Monday	12:00 AM		6:00 AM	/-	12:00 PM	00 PM) 11:59 PM	•	
Tuesday	12:00 AM		6:00 AM	-0-	12:00 PM	6:0 PM) 11:59 PM	٠	Default operat
Wednesday	12:00 AM		6:00 AM		12:00 PM	6:C PM	11:59 PM	٠	hours
Thursday	12:00 AM		6:00 AM		12:00 PM	5:00 PM) 11:59 PM	٠	
Friday	12:00 AM		6:00 AM		12:00 PM	6:00 PM) 11:59 PM	۲	
Saturday	12:00 AM		6:00 AM		12:00 PM	6:00 PM	11:59 PM	•	
						Can	cel Save		

2. To change the start time, drag the button on the left side of the blue bar either to the left to begin the start time earlier or to the right to begin the start time later.

			9:00 AM			
Monday	12:00 AM	6:00 AM	L3	12:00 PM	6:00 PM	11:59 PM

3. To change the end time, drag the button on the right side of the blue bar either to the left to shorten the end time or to the right to lengthen the end time.

				5:00 PM	
Monday	12:00 AM	6:00 AM	12:00 PM	6:00 PM	11:59 PM
	12:00 AM	0:UU AM	12:00 PM	LAC 0:00 PM	11.59 PM

Hint: To fine-tune start and end times, click start time or end time button, and then use the left and right arrow keys on your keyboard to change the time in 5-minute increments.

4. By default, each day is made up of one time period. However, you can use the $\textcircled{\bullet}$ icon to define two time periods per day. For example, the figure below shows a setup for an office that answers calls in the morning and afternoon, and then transfers calls to an answering

service over lunch, on Monday through Friday. By doing this, you would create two time
frames (for example, one from 8 to noon and another from 1:00 to 5:00 PM).

		Name	Normal Business Hou	Note: Name	cannot be changed	
		When	🔿 Always 💿 Days	of the week and times O Spec	cific dates or ranges	
Sunday	12:00 AM		6:00 AM	12:00 PM	6:00 PM	11:59 PM
Monday	12:00 AM		6:00 AM	12:00 PM	6:00 PM	11:59 PM
Z Tuesday	12:00 AM		6:00 AM	12:00 PM	6:00 PM	11:59 PM
Wednesday	12:00 AM		6:00 AM	12:00 PM	6:00 PM	11:59 PM
Thursday	12:00 AM		6:00 AM	12:00 PM	6:00 PM	11:59 PM
Friday	12:00 AM		6:00 AM	12:00 PM	6:00 PM	11:59 PM
Saturday	12:00 AM		6:00 AM	12:00 PM	6:00 PM	11:59 PM

5. Click **Save** to save your selections.

The time frame appears as a row on the Time Frames page.

Time Frames			C
			Add Time Frame
Name	Description	Owner	
Normal Business Hours	Days and Times	Shared	

Hint: Moving the pointer over the blue text in the **Description** column shows the settings for that timeframe.

Time Frames		Day Monday	Time 8:00 am to 12:00 pm	0
		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	1:00 pm to 5:00 pm	Add Time Frame
Name	Description	Tuesday	8:00 am to 12:00 pm 1:00 pm to 5:00 pm	
Normal Business Hours	Days and Times	Wednesday	1:00 pm to 5:00 pm 8:00 am to 12:00 pm	Ø 8
		Thursday	8:00 am to 12:00 pm 1:00 pm to 5:00 pm	
		Friday	8:00 am to 12:00 pm 1:00 pm to 5:00 pm	

If you select Specific dates or ranges

Fields appear for entering dates or ranges (see Figure 2-8).

Add a Timeframe				×
Name	Normal Business Hours	lote: Name cannot be changed		
When	O Always O Days of the week and time	 Specific dates or ranges 		
Specific dates or ranges	to	•		
			Cancel	Save

Figure 2-8. Setting Dates or Ranges

1. Click in the left field, and then select a starting date and time from the pop-up calendar.

Add a Timeframe								x	
Name	Normal Business Hours				S			Note: Name cannot be changed	
When) Alı	ways	0	Days o	of the v	veek a	and tin	Specific dates or ranges	
Specific dates or ranges					to			•	
	0		Dece	mber	r 2015	5	0		
	Su	Мо	Tu	We	Th	Fr	Sa	Cancel Save	
			1	2	3	4	5	Cancel Save	
	6	7	8	9	10	11	12		
	13	14	15	16	17	18	19		
	20	21	22	23	24	25	26		
	27	28	29	30	31				
	Tim	е	12:0)0 am					
	Hou Min							apiens, Inc. 20.0.94	

- 2. Click in the right field, and then select an ending date and time from the pop-up calendar.

Add a Timeframe	:	×
Name	Normal Business Hours Note: Name cannot be changed	
When	○ Always ○ Days of the week and times ④ Specific dates or ranges	
Specific dates or ranges	12/30/2015 12:00 am to 12/30/2015 11:59 pm	
	to	
	Cancel Save	

4. Click **Save** to save your selections.

The time frame appears as a row on the Time Frames page.

Time Frames			S
			Add Time Frame
Name	Description	Owner	
Normal Business Hours	Specific Dates	Shared	

Hint: Moving the pointer over the blue text in the **Description** column shows the settings for that timeframe.

Time Frames	_	_		_	S
					Add Time Frame
Name	Description			Owner	
Normal Business Hours	Specific Dates	Begin	End	ed	@ 😣
		12/30/2015	12/30/2015		

Answering Rules

After you set up your time frames, you can create different answering rules for your time frames. You configure answering rules using the Answering Rules page. To display this page, click the **Answering Rules** icon at the top of the page:



The left side of the Answering page has a **Rings for** *n* **seconds** drop-down list that allows you to specify the maximum ring time (one ring is generally 5 seconds). When that time expires, the caller will be forwarded to the **Call Forward When Unanswered** rule if defined; otherwise, the caller will be forwarded to voicemail if enabled. The right side of the Answering Rules page has buttons for adding answering rules, and specifying allowed and blocked numbers.

Figure 2-9 shows examples of answering rules. In this figure:

- The extension has a rule to simultaneously ring many desk phones during Open Hours.
- Cell Forward rings many desk phones and a cell phone simultaneously.
- · Holiday and closed hour rules go straight to voicemail.

The active rule is the topmost rule that matches the conditions in the corresponding time frame. In Figure 2-9, for example, the time is around 1pm on Friday, so both **Open Hours** and **Cell Forward** rule match the time/day condition, but **Open Hours** is active because it is the topmost rule. You can change the order by using the arrows at left of each rule to drag the rules.

An	wering Rules / Kevin Selkowitz	(5702)	C
Ring	for 20 seconds		Allow / Block Add Rule
	Time Frame	Description	
\$	Open Hours Active	Simultaneously ring x5702, x5702a, x5702c, x5702b, x5702d, x570	2e
\$	Cell Forward	Simultaneously ring x5702, (425) 555-1212, x5702c, x5702e	
\$	Kevin Holiday	Do not disturb	
*	Closed Hours	Do not disturb	
*	Holidays	Do not disturb	



> To add an answering rule

1. From the Answering Rules page, click Add Rule.

The Add an Answering Rule page appears. From this page, you can create rules to screen callers, forward calls, and ring multiple numbers simultaneously.

Add an Answeri	ing Rule		×
Time Frame	Select a time frame	This is when your answering rule will apply	
	 Do not disturb Call screening 		
Call Forwarding	Always	Extension, number or phone	
	On Active	Extension, number or phone	
	When busy	Extension, number or phone	
	When unanswered	Extension, number or phone	
	When offline	Extension, number or phone	
	Simultaneous ring	 Include user's extension Ring all user's phones Answer confirmation for offnet numbers Extension, number or phone 0 	
	✓ Just ring user's extension	n	
		Cancel Save	

Figure 2-10. Add an Answering Rule Page

- 2. Complete the fields in the Add an Answering Rule page (see Table 2-3).
- 3. Click Save.

Field	Description
Time Frame	Select the time frame when this answering rule will apply.
Do not disturb	No phone rings, goes straight to voicemail if available.
Call screening	Prompts caller to say their name, lets you screen the call before accepting.
Call Forwarding Always	Immediately forwards to the number specified. See "Call Forward Drop-down Options" below.
Call Forwarding On Active	Forward calls to the number specified when you have one or more calls active. See "Call Forward Drop-down Options" below.
Call Forwarding When Busy	Forwards calls to the number specified when your extension has used all available call paths. See "Call Forward Drop-down Options" below.
Call Forwarding When Unanswered	Forwards calls to the number specified if the call is not answered after the specified ring timeout. See "Call Forward Drop-down Options" below.
Call Forwarding When Offline	Automatically forwards if your desk phone loses communication (such as during a power outage). See "Call Forward Drop-down Options" below.
Simultaneous ring	Rings many phones at once. Check box options allow you to:
	Include the user's extension.
	Ring all your user's phones.
	 Use the option "Answer confirmation for offnet numbers" to ensure that a person — and not voicemail — answers simrings to a cell/landline by prompting the answering party to press 1 to accept the call. An icon to the right of this option allows you to specify a ring delay.
	Note: A simring rings handsets, not users. So, for example, if 111 is listed, the simring will ring handset 111. If user 111 has a call forward set to their cell, however, the simring will not occur at the cell since simring rings handsets, not users.
Just ring user's extension	Rings just your phone.

Table 2-3. Fields in the Add an Answering Rule Page

Call Forward Drop-down Options

When entering an extension as a call forward option, a drop-down list allows you to forward the call to specific resources associated with that extension. Table 2-4 describes the options. Some options may not appear, depending on the features associated with the extension.

Table 2-4. Call Forward Drop-down Options on the Add an Answ	wering Rule Page
--	------------------

Field	Description
Handset	Bypasses the user answering rules and forwards to the handset associated with the specified user.
User	Forwards to the user at that extension and follows the user's answering rules.
Voicemail	Forwards to voicemail at the specified extension.
Queue	Forwards to the queue associated with that user.
Autoattendant	Forwards to the auto attendant associated with that user.
Conference	Forwards to a Conference bridge

Ring Timeout

At the top of the page is the ring timeout selection. This option specifies the number of seconds that your phones will ring or forwarding rule before going to voicemail (when available).

Allowing or Blocking Callers

The Answering Rules page has an **Allow/Block** button that allows you to permit or block calls from certain numbers. Using this feature, you can block unwanted calls to your phone, as well as calls from anonymous and unwanted numbers. Allowed numbers bypass user Do Not Disturb and Call Screening rules to ring through immediately.

1. From the Answering Rules page, click Allow/Block.

The Allow/Block page appears. This page has two lists, one for allowed phone numbers (on the left) and another for blocked phone numbers (on the right).

ALLOWED NUMBERS		BLOCKED NUMBERS
Enter a number	+	Enter a number +
	~	,
	\sim	Block anonymous or unknown

Figure 2-11. Allow/Block Page

- 2. To allow phone numbers, perform the following steps under ALLOWED NUMBERS:
 - a. Click in the Enter a number field.
 - b. Enter the number you want to allow.

- c. Click the button. The number appears in the **ALLOWED NUMBERS** list and a brief message tells you the allowed number was added.
- d. To add more numbers, repeat step 2.
- e. To remove a number, click the 💌 button next to that number.

Examples of allowed numbers	Allow / Block	×
	ALLOWED NUMBERS	BLOCKED NUMBERS
	555-1234 X 555-2468 X	^
	~	Block anonymous or unknown
		Done

Figure 2-12. Example of Allowed Numbers

- 3. To block phone numbers, perform the following steps under **BLOCKED NUMBERS**:
 - a. Click in the Enter a number field.
 - b. Enter the number you want to block.
 - c. Click the button. The number appears in the **BLOCKED NUMBERS** list and a brief message tells you the blocked number was added.
 - d. To add more numbers, repeat step 3.
 - e. To remove a number, click the 💌 button next to that number.
- 4. To block anonymous calls and calls from unknown numbers, check **Block anonymous or unknown**.

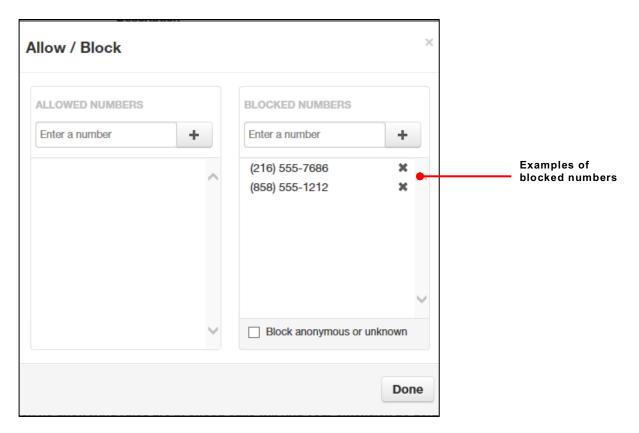


Figure 2-13. Example of Blocked Numbers

5. When you are finished, click **Done**.

Contacts

By default, contacts contain all the extensions on your system. However, you can add contacts to enable easier access to everyone you need to reach.

You configure contacts using the Contacts page. To display this page, click the **Contacts** icon at the top of the page:



The following figure shows an example of a Contacts page. The sections following the figure describe the key areas on the page.

All				Add Contac	ct
Enter a name or extension				Import Expor	ort
Name	Number(s)	Status	Department		
Kanen Tilopell	102		n/a		
 Jim Halpet 	101		n/a		
 Familialpati 🚖 	104				
○ Binding Hadron ☆	103			(Ø

Filter and Search

The **All** pull-down list allows you to search contacts by group. Using this list, you can select groups to search such as Favorites, Departments, Available, Busy, and more. Selecting a group filters the contacts on the page to show only the ones located in the group selected.

The **Enter a name or extension** field below the drop-down list allows you to search by contact name or extension. Entering a name or extension in this field filters the contacts on the page to show only the ones that match your entry. Click the $\boxed{\times}$ in this field to delete your entry and redisplay all contacts.

Add and Import Contacts

The **Add Contact** button allows you to add a contact one at a time. These are for external contacts only. Your contact list will automatically update with your internal extensions.

Import will allow you to select a file from your PC, the import can accept CSVs from Microsoft Outlook and Gmail as well as vCards.

Adding a Contact

- > To add a contact
- 1. From the Contacts page, click Add Contact.

The Add Contact page appears.

Add Contact		×
First Name		
Last Name		
Work number		
Mobile number		
Home number		
Email		
	Cance	el Save

- 2. Complete the fields in the Add Contact page (see Table 2-5).
- 3. Click Save.

The contact appears on the Contacts page.

Table 2-5	Fields	in the	Add	Contact	Page
-----------	--------	--------	-----	---------	------

Field	Description
First Name	Contact's first name.
Last Name	Contact's last name (surname).
Work number	Contact's work telephone number.
Mobile number	Contact's mobile telephone number.
Home number	Contact's home telephone number.
Email	Contact's email address.

Importing Contacts

> To import contacts

1. From the Contacts page, click Import.

The Import Contacts pop-up window appears.

Import Contacts	×
Browse	Outlook, Google, and Apple vCard
	Cancel Import

- 2. Click the **Browse** button.
- 3. In the Choose File to Upload dialog box, go to the location where the file you want to import is located. Click the file, and then click **Open**.

The path and file appear in the **Browse** field.

4. Click Import.

The imported contacts appear on the Contacts page.

Selecting Favorites

When hovering over a contact, a light gray star appears next to the contact name. Clicking the star selects the contact as a favorite and changes the color of the star to yellow.

Editing Contacts

When hovering over a contact you'll see an edit button on the far right, click that button to edit the contact.

Phones

The Phones page allows you to manage your phones. To display the Phones page, click the **Phones** icon at the top of the page:



Each row shows a phone that has been added to the system, along with:

- Whether the phone is registered.
- The phone name and device type. The hyperlink below the **Name** column allows you to edit the phone information. You can also edit or delete phones using icons on the right side of the row.
- The phone's IP address, MAC address, and line number on the phone associated with your extension.

Clicking the Refresh button updates the information shown on the page.

The page has an **Add** Phone button that adds phones to your system. This task usually is performed by administrators and is not described in this guide.

The Phones page also has a **SNAPmobile** button that allows you to access SNAPmobile. SNAPmobile is a mobile app that turns your cell phone into an extension of your Cloud PBX. Make and receive calls with the same identify as being in the office along with managing your voicemail, answering rules, and contacts. To start using SNAPmobile, see "Using SNAPmobile" on page 40.

	Home	e Messages	Contacts	Answering Rules	Time Frames	Phones	Music on Hold	Call History	
Phones	/ Basic (Jser (1003)	-	-	-		s	NAPmobile	C Add Phone
Registered	Name	Device Type		IP Address	ма	C Address	_	Line	
×	1003	-			-			-	
×	1003b	Polycom VVX400			00:0	00:00:00:00:11		1	

Using SNAPmobile

- > To use SNAPmobile
- 1. From the Phones page, click **SNAPmobile**.

The splash screen in Figure 2-14 appears.

SNAPmobile - Mobi	ile App		×
2	beyond the land lin NetSapiens platfor Unified Communic With SNAPmobile,	IP softclient that extends VoIP functionality e or desk top. It brings features of the n directly to end-user's mobile devices as a ations solution. users are able to maintain the same identity ceiving calls from any location, regardless of th	heir
	Logir	Info	
	Host ID	•	
	Username: 1003 Password: {us		
Appl	e iOS	Android	
	nload on the		
ФАр	p Store		
回続	580		
- 1633	X 19		
前界			
Scan with your ph	none to download.	Scan with your phone to download.	
ooan waryou pi	iono to dominoidu.	our with your phone to download.	
		Cance	el

Figure 2-14. SNAPmobile Splash Screen

2. Scan the QR code to download the app or search for SNAPmobile in the app store, and then enter the information from that page into the SNAPmobile logon screen.

Music On Hold

Music on Hold allows you to specify personal music on hold for your extension. You configure music on hold files using the Music On Hold page. To display this page, click the **Music on Hold** icon at the top of the page:



The **Add Music** button allows you to add music on hold files. When you add music on hold files, the file name appears on the Music On Hold page, along with the duration and file size. The **Settings** button allows you to play an introductory greeting.

If you hover over a file you can see options to play the file, download the file, edit the name, or delete the file. If multiple files are uploaded you can rearrange them using the arrows at the left of the page.

Mu	sic (On Hold	_		C	
					Settings Add Music	
		Song Name	Duration	Filesize		
*		My Music on Hold	0:04	33.47 KB		

Adding Music on Hold Files

- > To add music on hold files
- 1. From the Music On Hold page, click Add Music.

The Add Music page appears.

Add Music	×
Browse	
Song Name	Enter the song name or description
	Cancel Upload

- 2. Click the **Browse** button.
- 3. In the Choose File to Upload dialog box, go to the location where the file you want to import is located. Click the file, and then click **Open**.

The path and file appear in the **Browse** field.

NOTE: The music file must be in MP3 or WAV format, and must be properly licensed.

- 4. In the **Song** Name field, enter a name for the song.
- 5. Click Upload.

The music file appears on the Music on Hold page.

Playing an Introductory Greeting

- > To play an introductory greeting before having the music on hold file play
- 1. From the Music On Hold page, click **Settings.**

The Music on Hold Settings page appears.

Music on Hold Settings			
Play introductory greeting			
	Cancel	Save	

- 2. Check Play introductory greeting.
- 3. Click Save.

Call History

The Call History page shows a log of all your extensions calls. It also provides tools to filter and export data.

The left side uses color-coded icons to represent call status:

- Green = outbound calls
- Blue = inbound received calls
- Red = missed calls

Moving your screen pointer over an icon displays a tooltip with the call status. For example:



You can click a number in the Number column dial back the number. Clicking the Refresh

button button button updates the information shown on the page.

To display the Call History page, click the **Call History** icon at the top of the page:



Call History

The following figure shows an example of the Call History page. The sections following the figure describe the **Filters** and **Export** buttons.

Call History	Call History				
Filters 20	13-04-14 to 2013-04-17		Export		
Number	Name	Date 🗸	Duration		
5709	Tilliany/Trucing	Today, 4:28pm	0:14		
(206) 555-011	11	Today, 4:22pm	6:09		
(206) 555-011	11	Today, 4:20pm	0:00		
(206) 555-007	74 Theel Table	Today, 3:43pm	0:07		

Filtering the Call History

The **Filters** button allows you to filter the information displayed in the Call History page, so you can view only the information that interests you.

- > To filter the call history
- 1. From the Call History page, click **Filters**.

The Call History Filters page appears.

Call History Filters	×
Date Range	12/26/2015 to 12/29/2015
Caller Number	Enter the caller's number
Dialed Number	Enter the dialed number
Call Type	Select a call type
	Cancel Set Filters

- 2. Complete the fields in the Add Contact page (see Table 2-6).
- 3. Click Set Filters.

The Call History page appears, with only the items that match your criteria.

Field	Description
Date Range	To filter by a specified date range, click in the left field, and then select a starting date and time from the pop-up calendar (see Figure 2-15). Click in the right field, and then select an ending date and time from the pop-up calendar.
Caller Number	To filter by a caller number, enter the caller's number.
Dialed Number	To filter by a dialed number, enter the dialed number.
Call Type	To filter by type of call, select a call type.

Table 2-6. Fields in the Call History Filters Page

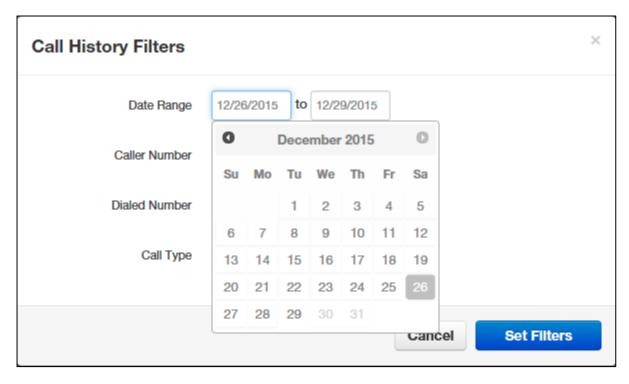


Figure 2-15. Selecting a Start Date from the Pop-up Calendar

Exporting the Call History Log

- > To export the call history log
- 1. From the Call History page, click **Export**.

Depending on your browser, the history log is downloaded to your computer or you are prompted to save the log. The log is in comma-separated-value (CSV) format.

2. After downloading the log, you can open it using Microsoft Excel, Google Docs, and other spreadsheet applications.

Profile

Clicking the **Profile** link at the top-right of the page displays the Profile page. From this page, you can configure the settings in Table 2-7.

Profile

First Name	Office
Last Name	Manager
Login Name	1001@kevinsworld
Department	
Timezone	US/Pacific -
Email Address(es)	kevin@something.com
Directory Options	 Announce in Audio Directory List in Directory
Caller ID Information	

Area Code	858	
Caller ID	8582424114	You cannot edit your Caller ID
911 Caller ID	8582424114	You cannot edit your 911 Caller ID

Change Password

New Password	
	Note: Password must be numbers only.
Confirm New Password	

Field	Description	
First Name	The first name and last name will be shown in contacts and used in the dial by	
Last Name	name directory.	
Timezone	Your local time zone.	
Email Address(es)	Address used for email, password resets, etc. To add email addresses, click	
	the 😶 button to add fields for entering more email addresses.	
Record User's Calls	Select whether the calls for this user will be recorded (Yes) or not recorded (No).	
Directory Options	Enables or disables announce in auto directory and list in directory features.	
	 Announce in Audio directory = check to include the user in the dial-by-name directory. 	
	• List in Directory = check to add user to the internal extensions list (contacts).	
Caller ID Information		
Area Code	Local area code for 7 digit dialing associated with the user.	
Caller ID	For outbound calls, this is the number that recipients will see.	
911 Caller ID	For calls to 911, this is the e911-enabled number the 911 agent will see.	
Change Password		
New Password	Password for voicemail and the portal. Avoid using common codes like 0000 or	
Confirm New Password	1234. For security, each typed password character is masked by a dot (●) Please keep this number secure. We will never call you to request your passcode.	

Table 2-7. Fields in the Profile Page



INDEX

3

3-way conference, 11

A

Accessing portal, 14 voicemail, 7 voicemail remotely, 8 Active calls, 15 Allowing callers, 33 Alternate greetings, 8 Answering rules, 30 Attended transfers, 10

В

Blind transfers, 10 Blocking callers, 33

С

Call forward, 32 Call handling, 10 Call history, 44 Callers, allowing or blocking, 33 Calls active, 15 incoming, 14 making, 6 receiving, 7 Contacts, 36

D

Dialing extension, 6 off-hook, 6 on-hook, 6 Directed call pickup, 11

Е

Extension dialing, 6 External number transfers, 11

G

Greeting recording, 19 uploading, 21

Н

Handling calls, 10 Home page, 16

Incoming calls, 14 Intercom, 6 International calls, 6 Introductory greeting, 43

Μ

Mailbox setup, 8 Making international calls, 6 Messages page, 17 Music on hold, 41

0

Off-hook dialing, 6 On-hook dialing, 6

Index

Ρ

Park and hold, 11 Phones page, 39 Portal, 14 call history, 44 contacts, 36 home page, 16 Messages page, 17 music on hold, 41 profile, 48

R

Receiving calls, 7 Recording a greeting, 19 Remote voicemail, 8 Ring timeout, 33

S

Setting up your mailbox, 8

SNAPmobile, 40

Т

Time frames, 22 Transfers attended, 10 blind, 10 external numbers, 11 voicemail, 11

U

Uploading a greeting, 21

V

Voicemail, 17 accessed, 7 accessed remotely, 8 settings, 18 transfer, 11 tree, 8

Fount Networks has made a good faith effort to ensure the accuracy of the information in this document and disclaims the implied warranties of merchantability and fitness for a particular purpose and makes no express warranties, except as may be stated in its written agreement with and for its customers.

Fount Networks shall not be held liable to anyone for any indirect, special or consequential damages due to omissions or errors. The information and specifications in this document are subject to change without notice.

Copyright © 2020. All Rights Reserved. All trademarks and registered trademarks are the property of their respective owners.

PBX User Guide

July 01, 2020

Document version: Version 1